

TwinGen

The world's most compact heat and power boiler

Key Features

- Highly reliable
- No liquid lubricants
- Minimal maintenance
- Wall-hung packaging
- Coaxial air / flue piping
- Integrated Grid-Tie Inverter
- Drain free condensate system
- Maintenance-free air bearings
- Simple display and user interface
- Heat driven automatic control system
- Fast response time (similar to combi boiler)



Performance

Power output	2	kW
Heat output	10	kW
Overall efficiency	95	%
Seasonal efficiency	>105	%
Rotor speed	170,000	rpm

Fuel

Fuel type	Natural gas	G20
Fuel consumption (LHV)	12.65	kW

Emissions @ 100% load

NO _x (class 5)	< 17	ppm @15% O ₂
CO	< 200	ppm @15% O ₂
CO ₂ savings	600	Kg/year
Noise	< 55	dB (A) 1m


Operating Life

Service intervals	6,000	hours
Overhaul	30,000	hours
Design life	60,000	hours

Microturbine Engine Design

- Single shaft recuperated micro turbine
- Centrifugal compressor & axial turbine
- Integrated heat exchanger and burner
- Permanent magnet motor/generator
- Proven foil air bearing technology
- Exhausts gas recovery system
- Quiet and no vibrations
- Remote monitoring


Microturbine Engine Cycle

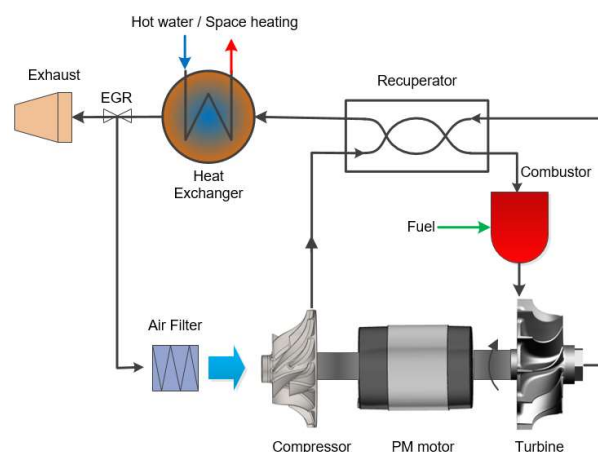



Installation

Dimensions (HxWxD)	780 x 480 x 450	mm
Weight (empty)	65 (58)	Kg
Gas connection	22 (3/4)	mm (In)
Water connection	22 (3/4)	
Grid connection	230 / 50	VAC, Hz

Heat / Power Diagram

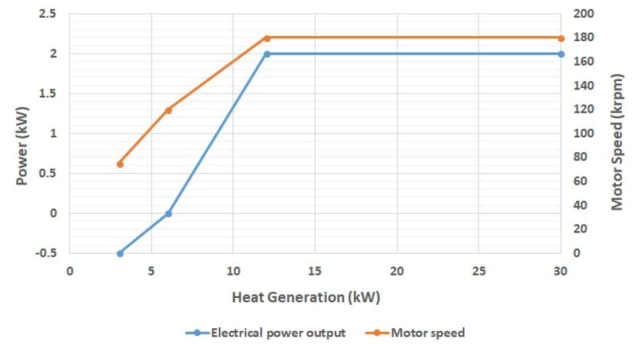

Physical specifications

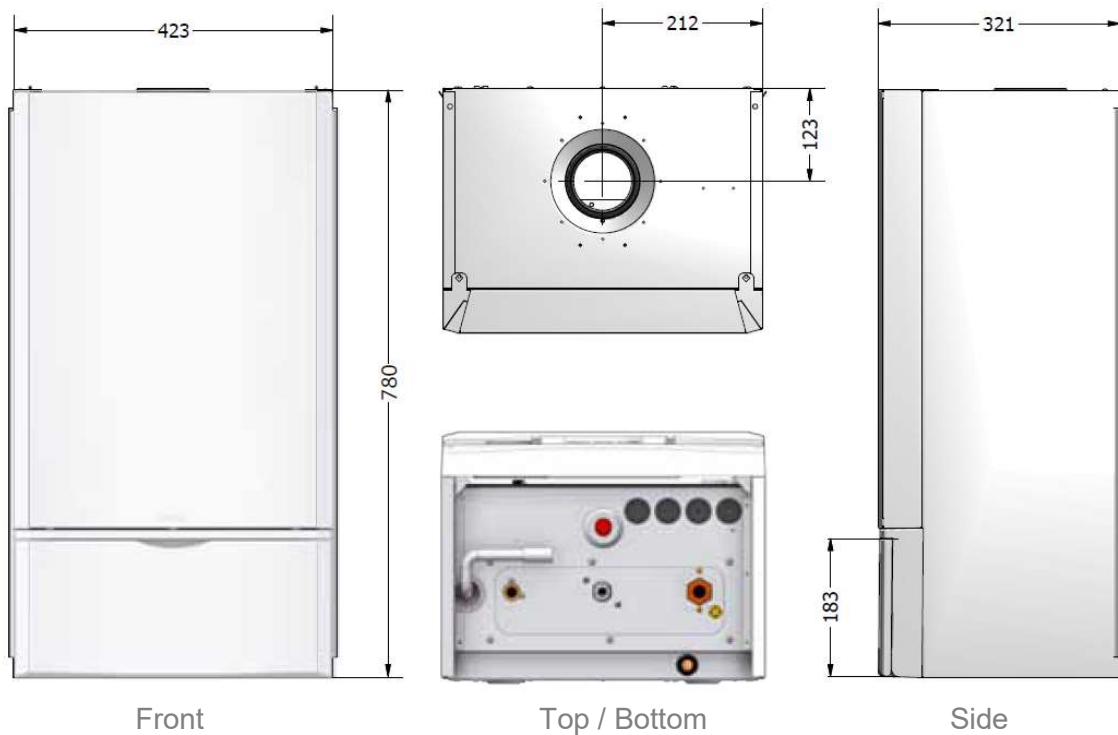

9 Centurion Court, Brick Close
 Kiln Farm, Milton Keynes
 MK11 3JB, UK

Tel: +44 (0)1908 260 688
info@samad-power.co.uk
www.samad-power.co.uk